

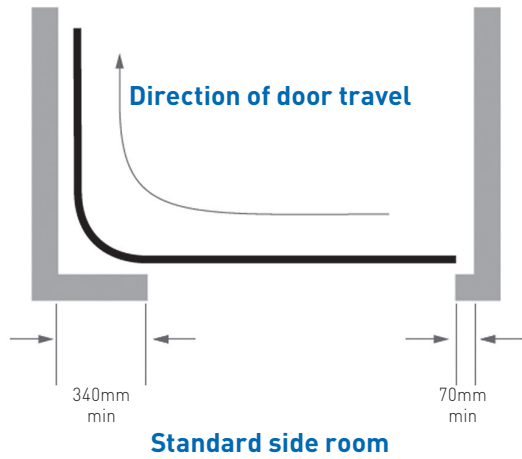



Installation dimensions

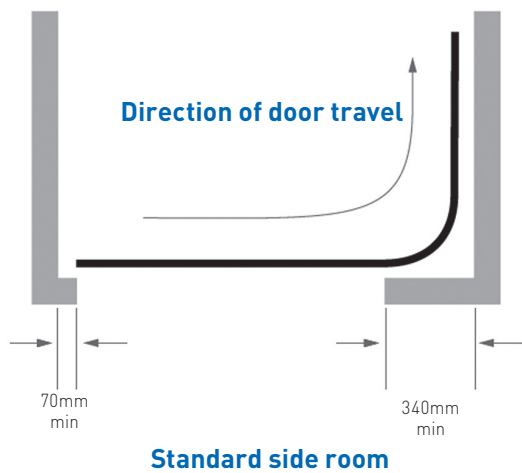

LEFT HAND

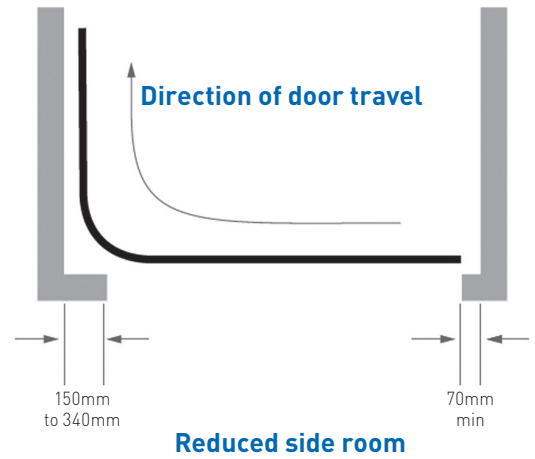

RIGHT HAND

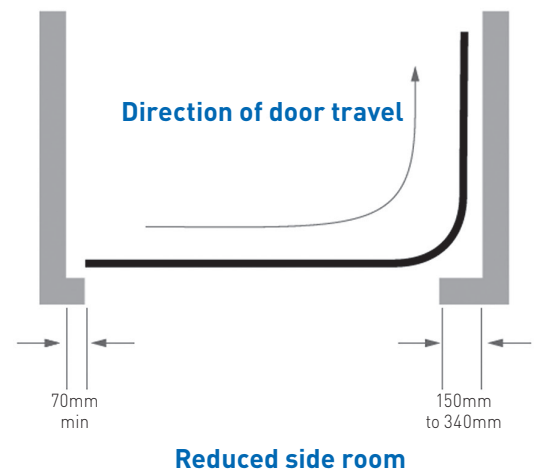

Specification

The door panels are made of self-supporting steel construction, double-skinned with CFC free foam between two steel cover skins, fully galvanised with base paint.

Woodgrain texture on outer face of all panels, all styles (narrow rib, flush and panelled).

Panel thickness of 45mm, with heat insulation value of $K = 0.5 \text{ W/m}^2\text{K}$.

Galvanised header track with fastening anchor.

Header, floor and side seals are pre-assembled (continuous brush seal on 4 sides).

Side rebate - lock side must be at least 70mm.

Side rebate - curve side must be at least 340mm.

Headroom must be at least 100mm.