

		common dimensions				70mm wide frame	
Door width			=W1+24	=W1-100	=W1-36	=W1+140	=W1+160
imp	mm	W1	W2	W3A	W3B	W4	W5
6'10"	2085	2085	2109	1985	2049	2225	2245
7'0"	2134	2134	2158	2034	2098	2274	2294
7'3"	2210	2210	2234	2110	2174	2350	2370
7'5"	2261	2261	2285	2161	2225	2381	2421
7'6"	2286	2286	2310	2186	2250	2426	2446
8'0"	2438	2438	2462	2338	2402	2580	2598

**W1** = Internal Frame Width

**W2** = Minimum Brickwork Opening (fitting behind)

**W3A** = Clear Drive through Width – Above the Crank of the Pivot Arm

**W3B** = Clear Drive through Width – Below the Crank of the Pivot Arm

**W4** = External Frame Width


**W5** = Recommended Brickwork Opening Width (fitting between)

**NOTE** – The crank in the pivot arm is

1000mm from the floor on a 1981mm high door

1100mm from the floor on a 2134mm high door

## Fitting behind the opening

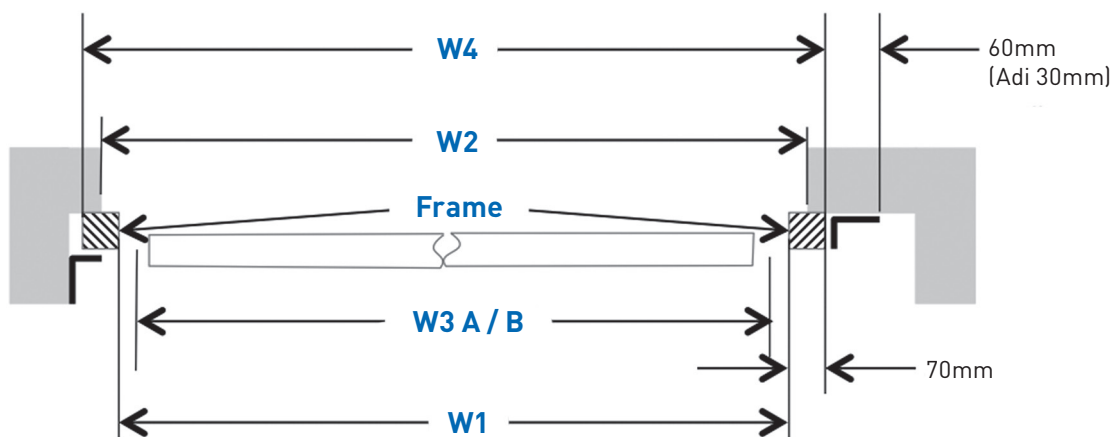

## Fitting within the opening

